

The Lysaght logo is positioned in the top right corner. It features the word "LYSAGHT" in a bold, white, sans-serif font. A white swoosh underline is positioned beneath the letters "AGHT". The background of the entire page is a dark blue with a complex, light-colored technical drawing or blueprint pattern. A large, light blue trapezoidal shape is overlaid on the right side of the page, containing the main text and a secondary headline.

**LYSAGHT**

A large, close-up photograph of trapezoidal steel cladding occupies the upper left and center of the page. The steel has a metallic, slightly weathered appearance with visible rivets or fasteners along the ridges. The perspective is from a low angle, looking up at the surface, which creates a sense of depth and scale. The lighting highlights the texture and the repeating pattern of the ridges.

**LYSAGHT<sup>®</sup>**  
**SPANDEK OPTIMA<sup>™</sup>**


Trapezoidal Steel  
Cladding with Longer  
Spanning Capability

## LYSAGHT® SPANDEK OPTIMA™

LYSAGHT® SPANDEK OPTIMA™ is a contemporary-looking, trapezoidal profile which is ideal where a stronger, bolder, more modern corrugated appearance is required.

LYSAGHT® SPANDEK OPTIMA™ was originally designed as a strong attractive roofing material for industrial and commercial construction - however SPANDEK OPTIMA™ has proved equally popular for homes and public buildings, underlining its versatility and pleasing appearance.

LYSAGHT® SPANDEK OPTIMA™ combines strength with lightness, rigidity and economy.

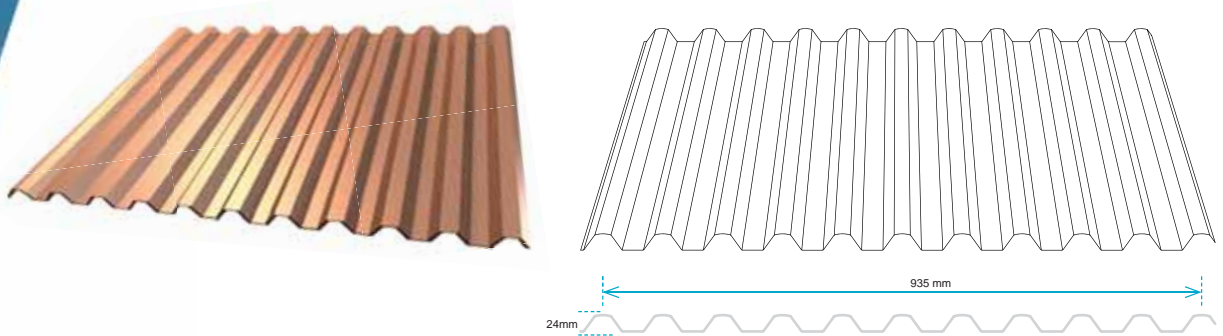

## PHYSICAL PROPERTIES

	STANDARD	
Base Metal Thickness (BMT) (mm)	0.42	0.48
Total Coated Thickness (TCT) (mm)	0.47	0.53
Mass per Unit Area - COLORBOND® Steel (kg/m <sup>2</sup> )	4.60	5.21
Mass per Unit Area - ZINCALUME® Steel (kg/m <sup>2</sup> )	4.52	5.13
Coating Class (min)	AZ150	
Grade of Steel (MPa)	G550 (550MPa minimum yield stress)	
Effective Cover Width	935mm	
Rib Depth	24mm	
Min Recommended Roof Pitch/ Slope	3° (1 in 20)	
Tolerances	Length +0.0mm, -15.0mm / Width ± 4.0mm	
Custom Cut Lengths	Any measurement to a maximum transportable length.	

## PERFORMANCE

### MAXIMUM ALLOWABLE SUPPORT SPACING

Type of Span	BMT (mm)	
	0.42	0.48
<b>Roofs (mm)</b>		
Single Span	1500	2200
End Span	2100	2400
Internal Span	2300	3300
Unstiffened Eaves Overhang	200	250
Stiffened Eaves Overhang	450	500
<b>Walls (mm)</b>		
Single Span	2200	2300
End Span	3100	3200
Internal Span	3300	3300
Overhang	150	150

- For roofs: the data are based on foot-traffic loading.
- For walls: the data are based on pressures (see wind pressures table).
- Table data are based on supports of 1mm BMT.

Basic wind speed (Strength Limit State) = 57m/sec

Terrain category co-efficient = 0.83

Shielding factor = 0.85

Topography factor = 1

Design wind speed Strength Limit State (with above factors) = 40.2m/sec

Basic wind speed (Strength Limit State) = 40m/sec

Terrain category co-efficient = 1

Shielding factor = 1

Topography factor = 1

Design wind speed Strength Limit State (with above factors) = 40m/sec

#### Walls

$C_{pe} = -0.65$ ,  $K_i = 2$  for single and end spans,  $K_i = 1.5$  for internal spans

$C_{pi} = +0.2$

#### Roofs

$C_{pe} = -0.9$ ,  $K_i = 2$  for single and end spans,  $K_i = 1.5$  for internal spans

$C_{pi} = +0.2$

These spacings may vary by Serviceability and Strength Limit States for particular projects.

### MAXIMUM ROOF LENGTHS FOR DRAINAGE MEASURED FROM RIDGE TO GUTTER (m)

Peak Rainfall Intensity (mm/hr)	Roof Slope (degrees)			
	3	5	7.5	10
100	122	147	170	191
150	82	98	113	127
200	61	73	85	95
250	49	59	68	76
300	41	49	57	64
400	31	37	43	48
500	24	29	34	38

Penetrations will alter the flow of water on a roof. For assistance in design of roofs with penetrations, please seek advice from Lysaght representative.

## LIMIT STATE WIND PRESSURE CAPACITIES (kPa)

0.42mm BMT										
TYPE OF SPAN	LIMIT STATE	FOR ROOFS (c/c) SPAN (mm)								
		900	1200	1500	1800	2100	2400	2700	3000	3300
Single	Serviceability	3.46	2.67	1.94	1.29	0.80	0.48	0.32	0.24	-
	Strength*	10.85	8.70	6.70	4.98	3.68	2.92	2.58	2.53	-
End	Serviceability	3.12	2.71	2.31	1.93	1.58	1.27	0.99	0.74	-
	Strength*	7.94	6.46	5.08	3.88	2.95	2.36	2.04	1.92	-
Internal	Serviceability	3.47	2.99	2.54	2.13	1.76	1.46	1.21	0.99	0.79
	Strength*	9.09	7.53	6.08	4.79	3.78	3.11	2.69	2.48	2.34

0.48mm BMT										
TYPE OF SPAN	LIMIT STATE	FOR ROOFS (c/c) SPAN (mm)								
		900	1200	1500	1800	2100	2400	2700	3000	3300
Single	Serviceability	3.97	3.07	2.21	1.42	0.91	0.55	0.35	0.27	0.24
	Strength*	11.07	9.53	8.06	6.72	5.57	4.65	3.93	3.33	2.80
End	Serviceability	4.11	3.49	2.89	2.34	1.85	1.44	1.09	0.79	0.52
	Strength*	9.00	7.42	5.93	4.64	3.64	2.99	2.63	2.46	2.39
Internal	Serviceability	4.28	3.59	2.93	2.33	1.83	1.44	1.15	0.93	0.73
	Strength*	10.28	8.49	6.80	5.32	4.15	3.36	2.87	2.54	2.41


\* A capacity reduction factor of 0.9 is applied to strength capacities. These capacities are based on tests conducted at BlueScope Steel's NATA registered testing laboratory using a direct pressure testing rig. Supports must not be less than 1mm BMT.

## LIMIT STATES WIND PRESSURES

The wind pressure capacities are based on tests conducted at BlueScope Lysaght's NATA-registered testing laboratory. Testing was conducted in accordance with AS 1562.1 - 1992 Design and Installation of Sheet Roof and Wall Cladding - Metal, and AS 4040.2 - 1992 Resistance to Wind Pressure for Non-cyclonic Regions.

The pressure capacities for serviceability are based on a deflection limit of  $(\text{span}/120) + (\text{maximum fastener pitch}/30)$ .

The pressure capacities for strength have been determined by testing the cladding to failure (ultimate capacity). These pressures are applicable when the cladding is fixed to a minimum of 1.0mm, G550 steel.

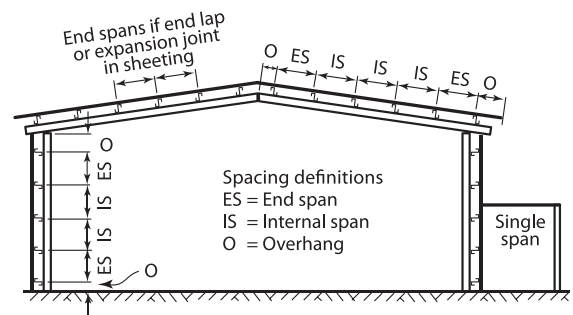

## METHOD STATEMENT AND GENERAL NOTES

### WALKING ON ROOFS

Keep your weight evenly distributed over the soles of both feet to avoid concentrating your weight on either heels or toes. Always wear smooth soft-soled shoes; avoid ribbed soles that pick up and hold small stones, swarf, and other objects.

When waling across the width of the roof, walk over, or close to, the roof supports.

### ADVERSE CONDITIONS

If this product is to be used in marine, severe industrial, or unusually corrosive environments, ask for advice from our Lysaght representative.

## METAL & TIMBER COMPATIBILITY

Lead, copper, free carbon, bare steel and green or some other chemically treated timbers are not compatible with this product. Don't allow any contact of the product with those materials, nor discharge of rainwater from them onto the product. Supporting members should be coated to avoid problems with underside condensation. If there are doubts about the compatibility of other products being used, ask for advice from our Lysaght representative.

## MAINTENANCE

Optimum product life will be achieved if all external walls are washed regularly. Areas not cleaned by natural rainfall (such as the tops of walls sheltered by eaves) should be washed down every six months.

## SAFETY, STORAGE AND HANDLING

LSYAGHT's product may be sharp and heavy. It is recommended that heavy-duty cut resistant gloves and appropriate manual handling techniques or a lifting plan be used when handling material.

Keep the product dry and clear off the ground. If stacked or bundled product becomes wet, separate it, wipe it with a clean cloth to dry thoroughly.

Handle materials carefully to avoid damage: don't drag materials over rough surfaces or each other; don't drag tools over material; protect from swarf.

## CUTTING

For cutting thin metal on site, we recommend a circular saw with a metal cutting blade because it produces fewer damaging hot metal particles and leaves less resultant burr than a carborundum disc does.

Cut materials over the ground and not over other materials. Sweep all metallic swarf and other debris from roof areas and gutters at the end of each day and at the completion of the installation. Failure to do so can lead to surface staining when the metal particles rust.

## FASTENERS

Fasteners without insulation			
	Fixing to steel up to 0.75mm BMT	Fixing to steel >0.75mm to 3mm BMT	Fixing to timber
Crest fixed	Self-drilling screws with hex. washer-head & EPDM seal, 12 - 11 x 50 (M5.5 – 11 x 50)	Self-drilling screws with hex. washer-head & EPDM seal, 12 - 14 x 50 (M5.5 – 14 x 50) or 12 - 14 x 55 (M5.5 – 14 x 55)	Type 17 Self drilling screws with hex. washer-head & EPDM seal, Softwood: 12 – 11 x 65 (M5.5 – 11 x 65) Hardwood: 12 – 11 x 50 (M5.5 – 11 x 50)
Valley fixed	Self-drilling screws with hex. washer-head & EPDM seal, 10 - 12 x 20 (M4.8 – 12 x 20) or Self-drilling screws with hex. washer-head & EPDM seal, 10 - 16 x 16 (M4.8 – 16 x 16)	Self-drilling screws with hex. washer-head & EPDM seal, 12 - 14 x 20 (M5.5 – 14 x 20) or 12 - 14 x 30 (M5.5 – 14 x 30)	Type 17 Self drilling screws with hex. washer-head & EPDM seal Softwood: 10 – 12 x 30 (M4.8 – 12 x 30) Hardwood: 10 – 12 x 20 (M4.8 – 12 x 20)
Side lap & accessories	Self-drilling screws with hex. washer-head & EPDM seal	10 – 16 x 16 or EPDM seal: 8 – 15 x 15	

### Fasteners with insulation


	Fixing to steel up to 0.75mm BMT	Fixing to steel >0.75mm to 3mm BMT	Fixing to timber
Crest fixed	Self-drilling screws with hex. washer-head & EPDM seal, 12 - 11 x 50 (M5.5 - 11 x 50)	Self-drilling screws with hex. washer-head & EPDM seal, 12 - 14 x 65 (M5.5 - 14 x 65) or 12 - 14 x 68 (M5.5 - 14 x 68)	Type 17 Self drilling screws with hex. washer-head Softwood: 12 - 11 x 65 (M5.5 - 11 x 65) Hardwood: 12 - 11 x 50 (M5.5 - 11 x 50)
Valley fixed	Self-drilling screws with hex. washer-head & EPDM seal, 10 - 12 x 20 (M4.8 - 12 x 20) or Self-drilling screws with hex. washer-head & EPDM seal, 10 - 16 x 16 (M4.8 - 16 x 16)	Self-drilling screws with hex. washer-head & EPDM seal, 12 - 14 x 30 (M5.5 - 14 x 30)	Type 17 Self drilling screws with hex. washer-head & EPDM seal Softwood: 10 - 12 x 30 (M4.8 - 12 x 30) Hardwood: 10 - 12 x 20 (M4.8 - 12 x 20) Softwood: 12 - 14 x 30 (M5.5 - 14 x 30) Hardwood: 12 - 14 x 20 (M5.5 - 14 x 20)
Side lap & accessories	Self-drilling screws with hex. washer-head & EPDM seal	10 - 16 x 16 or EPDM seal: 8 - 15 x 15	

LYSAGHT® SPANDEK OPTIMA™ requires 5 fasteners per sheet per support as shown below. Fastener should comply to AS3566, Class 3 or Class 4.

**Roof** - Screw fix through rib  
Crest - 5 fixing



**Wall** - Screw fix through pan  
Valley - 5 fixing



### FASTENING SHEETS TO SUPPORTS

LYSAGHT® SPANDEK OPTIMA™ profile is pierced-fixed to timber or steel supports. This means that fastener screws pass through the sheeting.

You can place fasteners for LYSAGHT® SPANDEK OPTIMA™ through the crests or in the pans. To maximize watertightness, always place roof fasteners through the crests.


Always drive the fasteners perpendicular to the sheeting, and in the center of the corrugation or rib. Don't place fasteners less than 25mm from the ends of sheets.

### SEALED JOINTS


For sealed joints use screws or rivets and neutral-cure silicone sealant branded as suitable for use with galvanized or ZINCALUME® steel.

### SIDE-LAPS

The side of LYSAGHT® SPANDEK OPTIMA™ with the anti-capillary groove is always the underlap (see figures below). It is generally considered good practice to use fasteners along side-laps. However, when cladding is supported as indicated in Maximum Support Spacings, side-lap fasteners are not usually needed for strength.

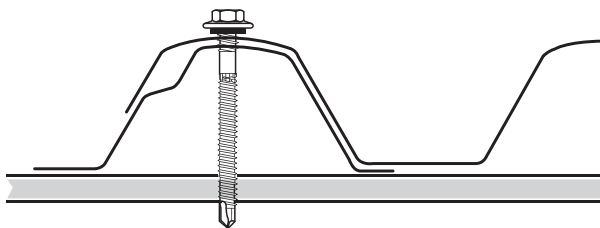

Crest fixing for roof or walls

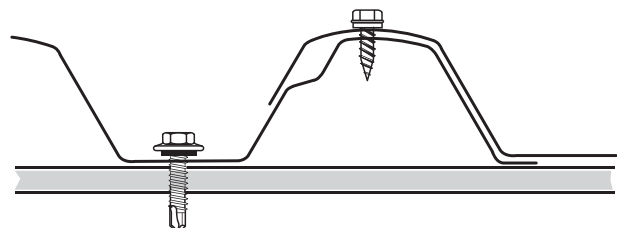

Valley fixing for walls only

## END LAPS

End-laps are not usually necessary because LYSAGHT® SPANDEK OPTIMA™ is available in long lengths. If you want end-laps, seek advice from our Lysaght representative on the sequence of laying and the amount of overlap.

## END OF SHEETS

It is usual to allow roof sheets to overlap into gutters by about 50mm. If the roof pitch is less than 25° or extreme weather is expected, the pans of sheets should be turned-down at lower ends and turned-up at upper ends by about 80°.


## LAYING PROCEDURE

For maximum weather-tightness start laying sheets from the end of the building that will be in the lee of worst-anticipated or prevailing weather.

It is much easier and safer to turn sheets on the ground than up on the roof.

Before lifting sheets on to the roof, check that they are the correct way up and the overlapping side is towards the edge of the roof from which installation will start.

Place bundles of sheets over or near firm supports, not at mid span of roof members.

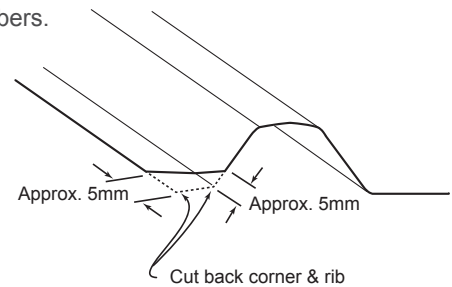


## SHEET-ENDS ON LOW SLOPES

When LYSAGHT® SPANDEK OPTIMA™ is laid on slopes of 5 degrees or less, cut back the corner of the under-sheet, at the downhill end of the sheet, to block capillary action.

## NON-CYCLONIC AREAS

The information in this brochure is suitable for use only in areas where a tropical cyclone is unlikely to occur as defined in AS 1170.2-2002. Map and table (below) taken from HB212-2002.

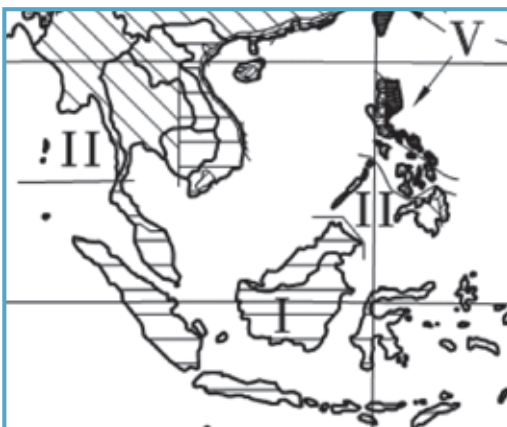

Wind speeds versus return period  
(3 s gusts, 10 m height, open country terrain)

Handbook Level	Description	Equation for $V_R$	$V_{50}$	$V_{500}$
I	Strong thunderstorms and monsoon winds	$70 - 56R^{-0.1}$	32	40
II	Moderately severe thunderstorms and extra-tropical gales	$67 - 41R^{-0.1}$	39	45
III	Severe thunderstorms and moderate or weakening typhoons/tropical cyclones	$106 - 92R^{-0.1}$	44	57
IV	Strong typhoons/ tropical cyclones	$122 - 104R^{-0.1}$	52	66
V	Very strong typhoons/ tropical cyclones	$156 - 142R^{-0.1}$	60	80

Table summarises the proposed relationships between 3 s gust wind speed and return period for the five levels in the handbook (see map). The values are for 50 years and 500 years return periods.

Note: All the product images used in this brochure are for reference purposes only and does not reflect the actual configuration of the product. Kindly note that the product images are indicative and for illustration purposes only. Lysaght reserves the right to make any change to product images without prior notice. For accurate and up-to-date information, seek advice from Lysaght representative.

# COLORBOND® STEEL AND ZINCALUME® STEEL

## STRONG BRANDS, QUALITY MATERIALS

LYSAGHT® products are made of highest quality material, namely COLORBOND® steel and ZINCALUME® steel which are the leading materials for external cladding application. COLORBOND® steel and ZINCALUME® steel have been used on countless buildings to portray modern architecture works of art, ranges from the classic roofing to advance façade for industrial, commercial and residential buildings.

## Colorbond®

COLORBOND® steel is a pre-painted finished product with ZINCALUME® steel substrate to deliver both superior corrosion resistance and excellent colour performance.

It comes with the THERMATECH® solar reflectance technology and Clean technology to minimize tropical dirt staining while lowering urban heat island effect, delivering longevity and minimal maintenance to your external cladding.

COLORBOND® steel is backed by a material warranty of up to 25 years\*

### Product Attributes

- Pre-painted finish on top of ZINCALUME® steel substrate to deliver superior corrosion resistance.
- Superior primer technology which prevents paint delamination.
- Proprietary super polyester paint system proven to provide excellent colour performance.
- Clean technology incorporated to resist against tropical dirt staining.
- THERMATECH® solar reflectance technology to allow for lower temperature cladding.
- Wide varieties of colours and finishes to cater for your building design needs.

## Zincalume®

ZINCALUME® steel is a metallic coated steel product composed of 55% aluminium, 43.5% zinc and 1.5% silicon (aluminium-zinc alloy coating) that can provide superior corrosion resistance for your external cladding, with expected lifespan that's four times the life of generic alternatives (GI).

ZINCALUME® steel is backed by a material warranty of up to 25 years\*

### Product Attributes

- Superior corrosion resistance due to the minimum coating class of AZ150.
- Initial resistance to surface marking and wet storage corrosion due to the proprietary clear resin coating.
- Better aesthetics compared to generic alternatives (Al-Zn) due to less surface darkening, afforded by the proprietary clear resin coating.
- Lightweight and thermally efficient compared to conventional roofing materials (e.g. concrete and clay tiles)
- Excellent flexibility in design as steel can be bent and curved to form truly unique designs.

*\*Warranty terms and conditions apply*

This material warranty may vary to buildings nearer to marine or industrial environment and is subjected to prior agreement by BlueScope. For full terms and conditions and to determine the eligibility of your project for the warranty, please contact your Key Account Manager.

There are different internal and external environments affecting the longevity of COLORBOND® steel and ZINCALUME® steel, hence feel free to consult our material experts for more specialized recommendations.

### Examples of recommendations:

- Direct contact between COLORBOND® steel or ZINCALUME® steel with copper, lead and stainless steel should be avoided.

If condensation on the reverse side of roofing sheet is likely, vapour barrier should be installed to shield COLORBOND® steel or ZINCALUME® steel from prolonged exposure to the condensation (moisture).



# REFERENCES



Hap Seng Business Park, Shah Alam



Stinis Factory @ Nusajaya, Johor



ONE°15 Estuari Sports Centre, Johor

# REFERENCES



**A&A at Ngee Ann Polytechnic, Singapore**



**The Seed Residential @ Sutera, Skudai, Johor**



**The Seed Residential @ Sutera, Skudai, Johor**





### NS BLUESCOPE LYSAGHT MALAYSIA SDN BHD

Company No: 196801000301 (7896-D)  
NO 6, PERSIARAN KEMAJUAN, SEKSYEN 16,  
40200 SHAH ALAM,  
SELANGOR DARUL EHSAN, MALAYSIA.  
TEL: +603-5520 6600 FAX: +603-5520 6601/2

#### NORTHERN

1-2-9, KRYSTAL POINT CORPORATE PARK,  
JALAN TUN DR. AWANG,  
LEBUH BUKIT KECIL 6,  
11900 SUNGAI NIBONG,  
PENANG, MALAYSIA.  
TEL: +604-646 9553 / 6653 FAX: +604-646 6853

#### SOUTHERN

BMS MALL - BLOCK A #02-08,  
NO. 6, JALAN KENCANA MAS 2/1,  
KAWASAN PERINDUSTRIAN TEBRAU III,  
81100 JOHOR BAHRU,  
JOHOR DARUL TAKZIM, MALAYSIA.  
TEL: +607-355 1576/7/8  
FAX: +607-355 1579

### NS BLUESCOPE LYSAGHT SABAH SDN BHD

Company No: 197201001095 (12749-X)  
LORONG KURMA OFF JALAN KOLOMBONG,  
88450 KOTA KINABALU,  
SABAH, MALAYSIA.  
TEL: +6088-445 161 FAX: +6088-421 178



COATING



COLOUR CHOICES



DESIGN FLEXIBILITY



DURABILITY / SECURITY



HI-TECH PRODUCTION



RECYCLING



TERMITE PROOF



THERMAL EFFICIENCY



WARRANTY

### NS BLUESCOPE LYSAGHT (SARAWAK) SDN BHD

Company No: 197701002868 (33837-P)  
**KUCHING**  
LOT 610, SECTION 66, PENDING INDUSTRIAL AREA,  
JALAN MERBAU, 93450 KUCHING,  
SARAWAK, MALAYSIA.  
TEL: +6082-333 621 FAX: +6082-483 486

#### BINTULU

LOT 974, BLOCK 26 KLD,  
KIDURONG LIGHT INDUSTRIAL ESTATE,  
97000 BINTULU, SARAWAK, MALAYSIA.  
TEL: +6086-251 736 FAX: +6086-252 881

### NS BLUESCOPE LYSAGHT (B) SDN BHD

INDUSTRIAL COMPLEX,  
BERIBI PHASE 1,  
6KM, JALAN GADONG,  
BANDAR SERI BEGAWAN BE 1118,  
BRUNEI DARUSSALAM.  
TEL: +673-244 7155 FAX: +673-244 7154

### NS BLUESCOPE LYSAGHT SINGAPORE PTE LTD

18 BENOI SECTOR,  
JURONG TOWN,  
SINGAPORE 629851  
TEL: +65-6264 1577 FAX: +65-6265 0951



[www.lysaghtasean.com](http://www.lysaghtasean.com)

Copyright © 2021 by BlueScope Steel Limited. All rights reserved. No part of this brochure shall be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without written permission from BlueScope Steel Limited. LYSAGHT®, COLORBOND® and ZINCALUME® are registered trademarks and SPANDEK OPTIMA™ is a trademark of BlueScope Steel Limited. BlueScope is a trademark of BlueScope Steel Limited.

May 2021