

BlueScope Lysaght DECRA® Roofing Systems



The Beauty of
Steel and Stone

Installation Method

DECRA® Roman Tiles



Decra® Roman Tiles shall be installed with batten either timber batten or steel batten.

shall be 370mm measured from the front of the batten. This is the surface where the tiles will be fixed to the batten.

When fiberglass insulations are required, it has to be laid before the battens installation.

The batten spacing for Decra® Roman Tiles

Note: all dimensions given are nominal

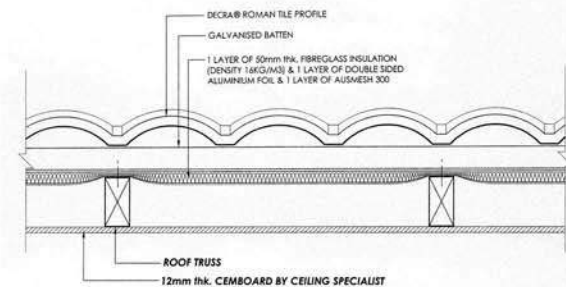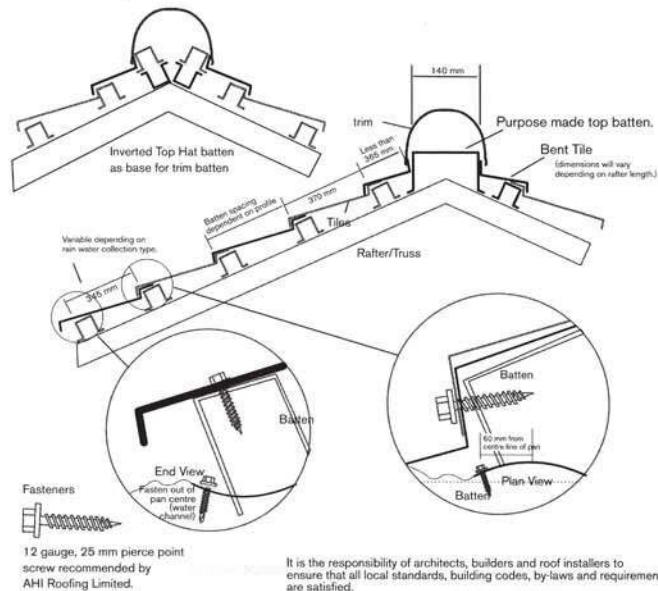

DECRA® Shingles & DECRA® Shake


Lysaght® Spandek® shall be used as roof substrate for installation of Decra® Shingles & Decra® Shake

Recommended roof build-up system (all items above the purlin):

1. Decra® Shingles or Decra® Shake top-

- roof layer
2. 1.50mm thick self-adhesive bitumen felt
3. Lysaght® Spandek® roof substrate
4. One layer of 50mm thick Rockwool insulation with density of 60kg/m³

5. One layer or double-sided aluminium foil
6. One layer of AUSMESH 300 safety mesh

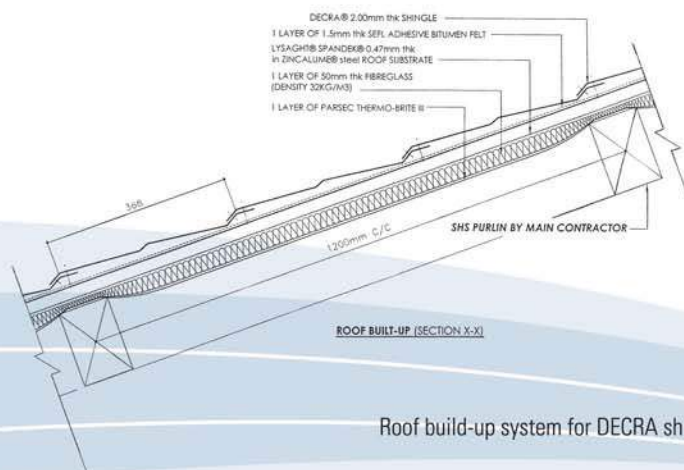

Roof build-up system for DECRA shingles & DECRA shake roof tiles



BlueScope Lysaght (Singapore) Pte Ltd
18 Benoi Sector,
Jurong Town
Singapore 629851

Tel: 65-6264 1577
Fax: 65-6265 0951

www.bluescopesteel.com.sg

Copyright © 2009 by BlueScope Lysaght Singapore. All rights reserved. No part of this brochure shall be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, recording or otherwise, without written permission from BlueScope Steel Limited. ZINCALUME®, COLORBOND® and LYSAGHT® are registered trade marks of BlueScope Steel Limited. BlueScope is a trademark of BlueScope Steel Limited.

BLUESCOPE LYSAGHT
... Beyond Roofing



DESIGN
FLEXIBILITY



DURABILITY /
SECURITY



HI-TECH
PRODUCTION



RECYCLING



COLOUR
CHOICES



THERMAL
EFFICIENCY



WARRANTY